



Dioničko društvo BH Telecom Sarajevo
Franca Lehara 7, 71000 Sarajevo, BiH
Izvršna direkcija za tehnologiju i razvoj servisa
tel: +387 33 256 500; fax: +387 33 256 505

BH TELECOM d.d. SARAJEVO

Izvršna direkcija za tehnologiju i razvoj servisa

TENDERSKA DOKUMENTACIJA ZA NABAVKU

INFRASTRUKTURA I INSTALACIJA OPREME ZA AUTONOMNI HIBRIDNI SISTEM NAPAJANJA SJEDNICA, BILEĆA (LOT 1 i 2)

PROVOĐENJEM NABAVKE PUTEM PREGOVARAČKOG POSTUPKA NABAVKE SA OBJAVOM
OBAVJEŠTENJA

PRILOG III

SITUACIJA, DISPOZICIJA OPREME I GRAFIČKI PRILOZI (NACRTI)

Lokacija: BS Sjednica, Bileća, BiH

Koordinate: 42,9448° N · 18,3236° E · 1076 m n.v.

Sarajevo, august 2026. godine



BH TELECOM d.d. SARAJEVO | BS SJEDNICA (BILEĆA) | PRILOG III

Fotografija postojećeg stanja lokacije


Antenski stub, kontejner, ograda — stanje prije izvođenja radova

Crtež br.
INFO-01

1. OPŠTI PODACI O LOKACIJI

Investitor	BH Telecom d.d. Sarajevo, Franca Lehara 7, 71000 Sarajevo
Objekat	Bazna stanica SJEDNICA
Općina / Entitet	Bileća / Republika Srpska
Koordinate	42.9448° N, 18.3236° E
Nadmorska visina	1076 m
Zakupljena površina	150 m²
Betonski temelj	5,40 × 5,40 m, sa metalnom ogradom visine 1,90 m
Antenski stub	Rešetkasta izvedba, visina 38 m; baza 4,20 m (dno) / 1,20 m (vrh)
Kontejner	Vanjske dimenzije 3,005 × 2,30 m, zidni paneli 60 mm (unutra 6,29 m2), IP55, prema ovjerenom projektu lokacije; PRAZAN
Priključak na EES	NE — lokacija nije priključena na elektroenergetsku mrežu
TK oprema	Huawei RRU (3 kom) + BBU/MPLS, -48 VDC
Snaga potrošača	1.180 W nazivno / 1.330 W maksimalno (sa hlađenjem)
Sistem napajanja	Hibridni: FN moduli (primarni) + LFP baterije + DEA (rezervni)
FN konfiguracija	12 × 585 Wp (7,02 kWp), fiksni nagib 45°, bifacijalni
DEA	22 kVA / 17,6 kW stand-by (ISO 8528-3), skid izvedba u kontejneru
Spremnik goriva	Dvoplašni, 500 l , sa nivo sondom i detekcijom curenja
Maks. rad DEA	250 h/god (standby režim prema ISO 8528)

Napomena: podaci preuzeti iz RFI dokumenta „Autonomno napajanje za BS“ od 27.04.2026. godine i Projektnog zadatka za hibridno napajanje BS Sjednica. Konstruktivni podaci kontejnera preuzeti iz Projektnog zadatka za tipsku prenosivu kućicu — kontejner (opterećenje poda 10,00 kN/m², snijeg 3,00 kN/m², vjetar 1,10 kN/m²). DEA kao FG Wilson P22-6 (motor Perkins 404D-22G1, EU Stage IIIA) ili ekvivalent.

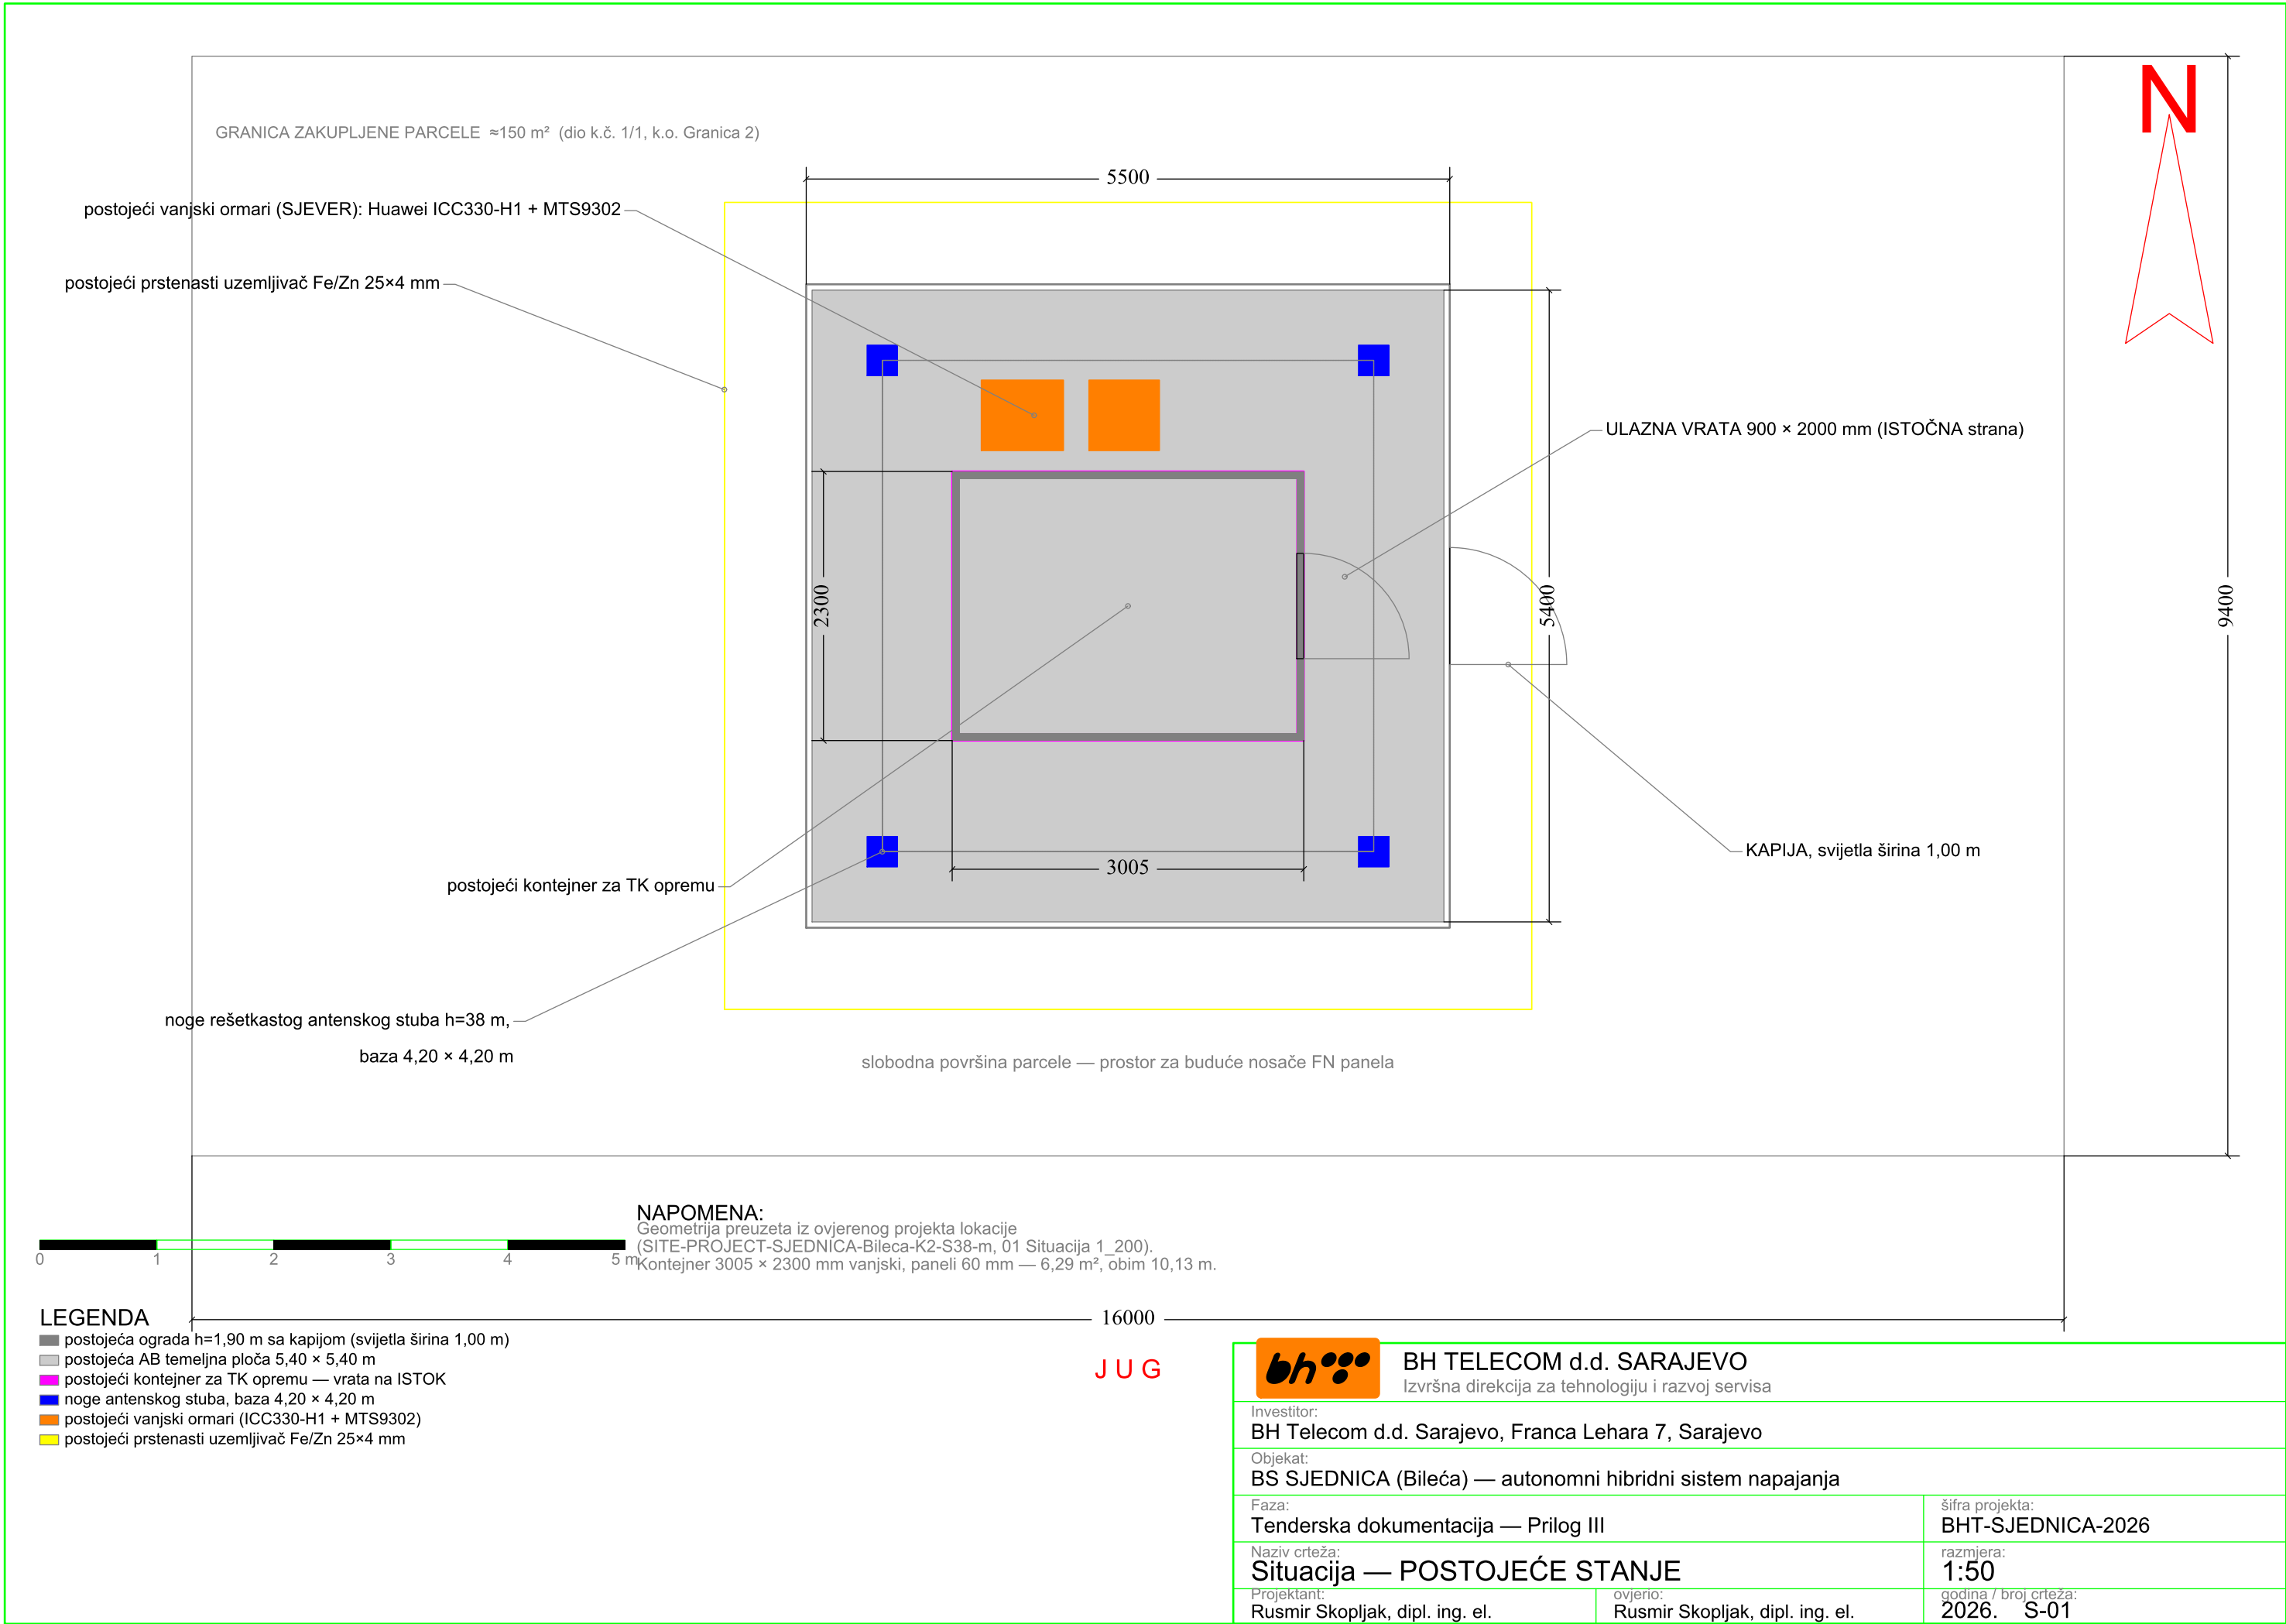


GRANICA ZAKUPLJENE PARCELE ≈150 m² (dio k.č. 1/1, k.o. Granica 2)

kanal + žaluzina 600 × 600, izduv DN 65 iznad krova — ZAPADNI zid; ventilator 1200 m³/h — ISTOČNI zid



9400

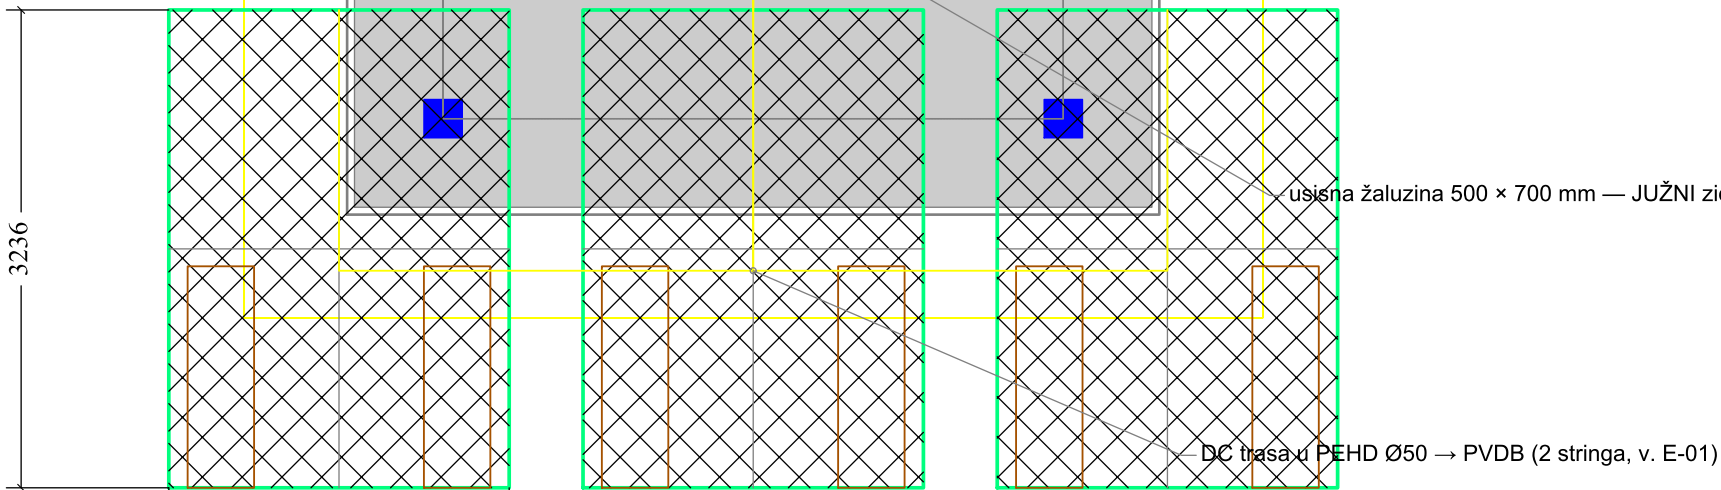

usisna žaluzina 500 × 700 mm — JUŽNI zid

DC trasa u PEHD Ø50 → PVDB (2 stringa, v. E-01)

PV-1 · 4 × 585 Wp · 45° JUG

PV-2 · 4 × 585 Wp · 45° JUG

PV-3 · 4 × 585 Wp · 45° JUG

2 temeljne trake po nosaču (×3), 450 × 3300, razmak 1600 — IZVAN ograde

4 5 m

LEGENDA

- LOT 1 — nosači FN panela PV-1..PV-3 (po 4 × 585 Wp, 45°, JUG) — 2 stringa × 6
- LOT 1 — AB temeljne trake 450 × 3300 mm, razmak 1600 mm
- LOT 1 — DC trasa u PEHD Ø50 do PVDB
- LOT 2 — DEA 22 kVA u skid izvedbi i spremnik 500 l
- LOT 2 — usisna žaluzina (JUG); kanal, žaluzina i izduv (ZAPAD); ventilator (ISTOK)

NAPOMENA — PRORAČUNSKO OPTEREĆENJE:

Vjetar $q_p \geq 1,20 \text{ kN/m}^2$ (udar 3 s $\approx 45 \text{ m/s}$) — iznad kapaciteta kataloškog nosača tipa A, stoga CUSTOM IZRADA: sail 10,55 m²/nosaču, ULS uzgon 18,1 kN, moment prevrtanja 62,8 kNm; ovjerava ponuđač (Prilog II, 1.3).
Temelji IZVAN ograde (400 mm od kote ograde); gornja ivica panela +4,23 m, 2836 mm iznad ograde. Kontejner je PRAZAN.



BH TELECOM d.d. SARAJEVO

Izvršna direkcija za tehnologiju i razvoj servisa

Investitor:

BH Telecom d.d. Sarajevo, Franca Lehara 7, Sarajevo

Objekat:

BS SJEDNICA (Bileća) — autonomni hibridni sistem napajanja

Faza:

Tenderska dokumentacija — Prilog III

Naziv crteža:

Situacija — BUDUĆE STANJE (LOT 1 + LOT 2)

Projektant:

Rusmir Skopljak, dipl. ing. el.

ovjerio:

Rusmir Skopljak, dipl. ing. el.

šifra projekta:

BHT-SJEDNICA-2026


razmjera:

1:50


godina / broj crteža:

2026. S-02




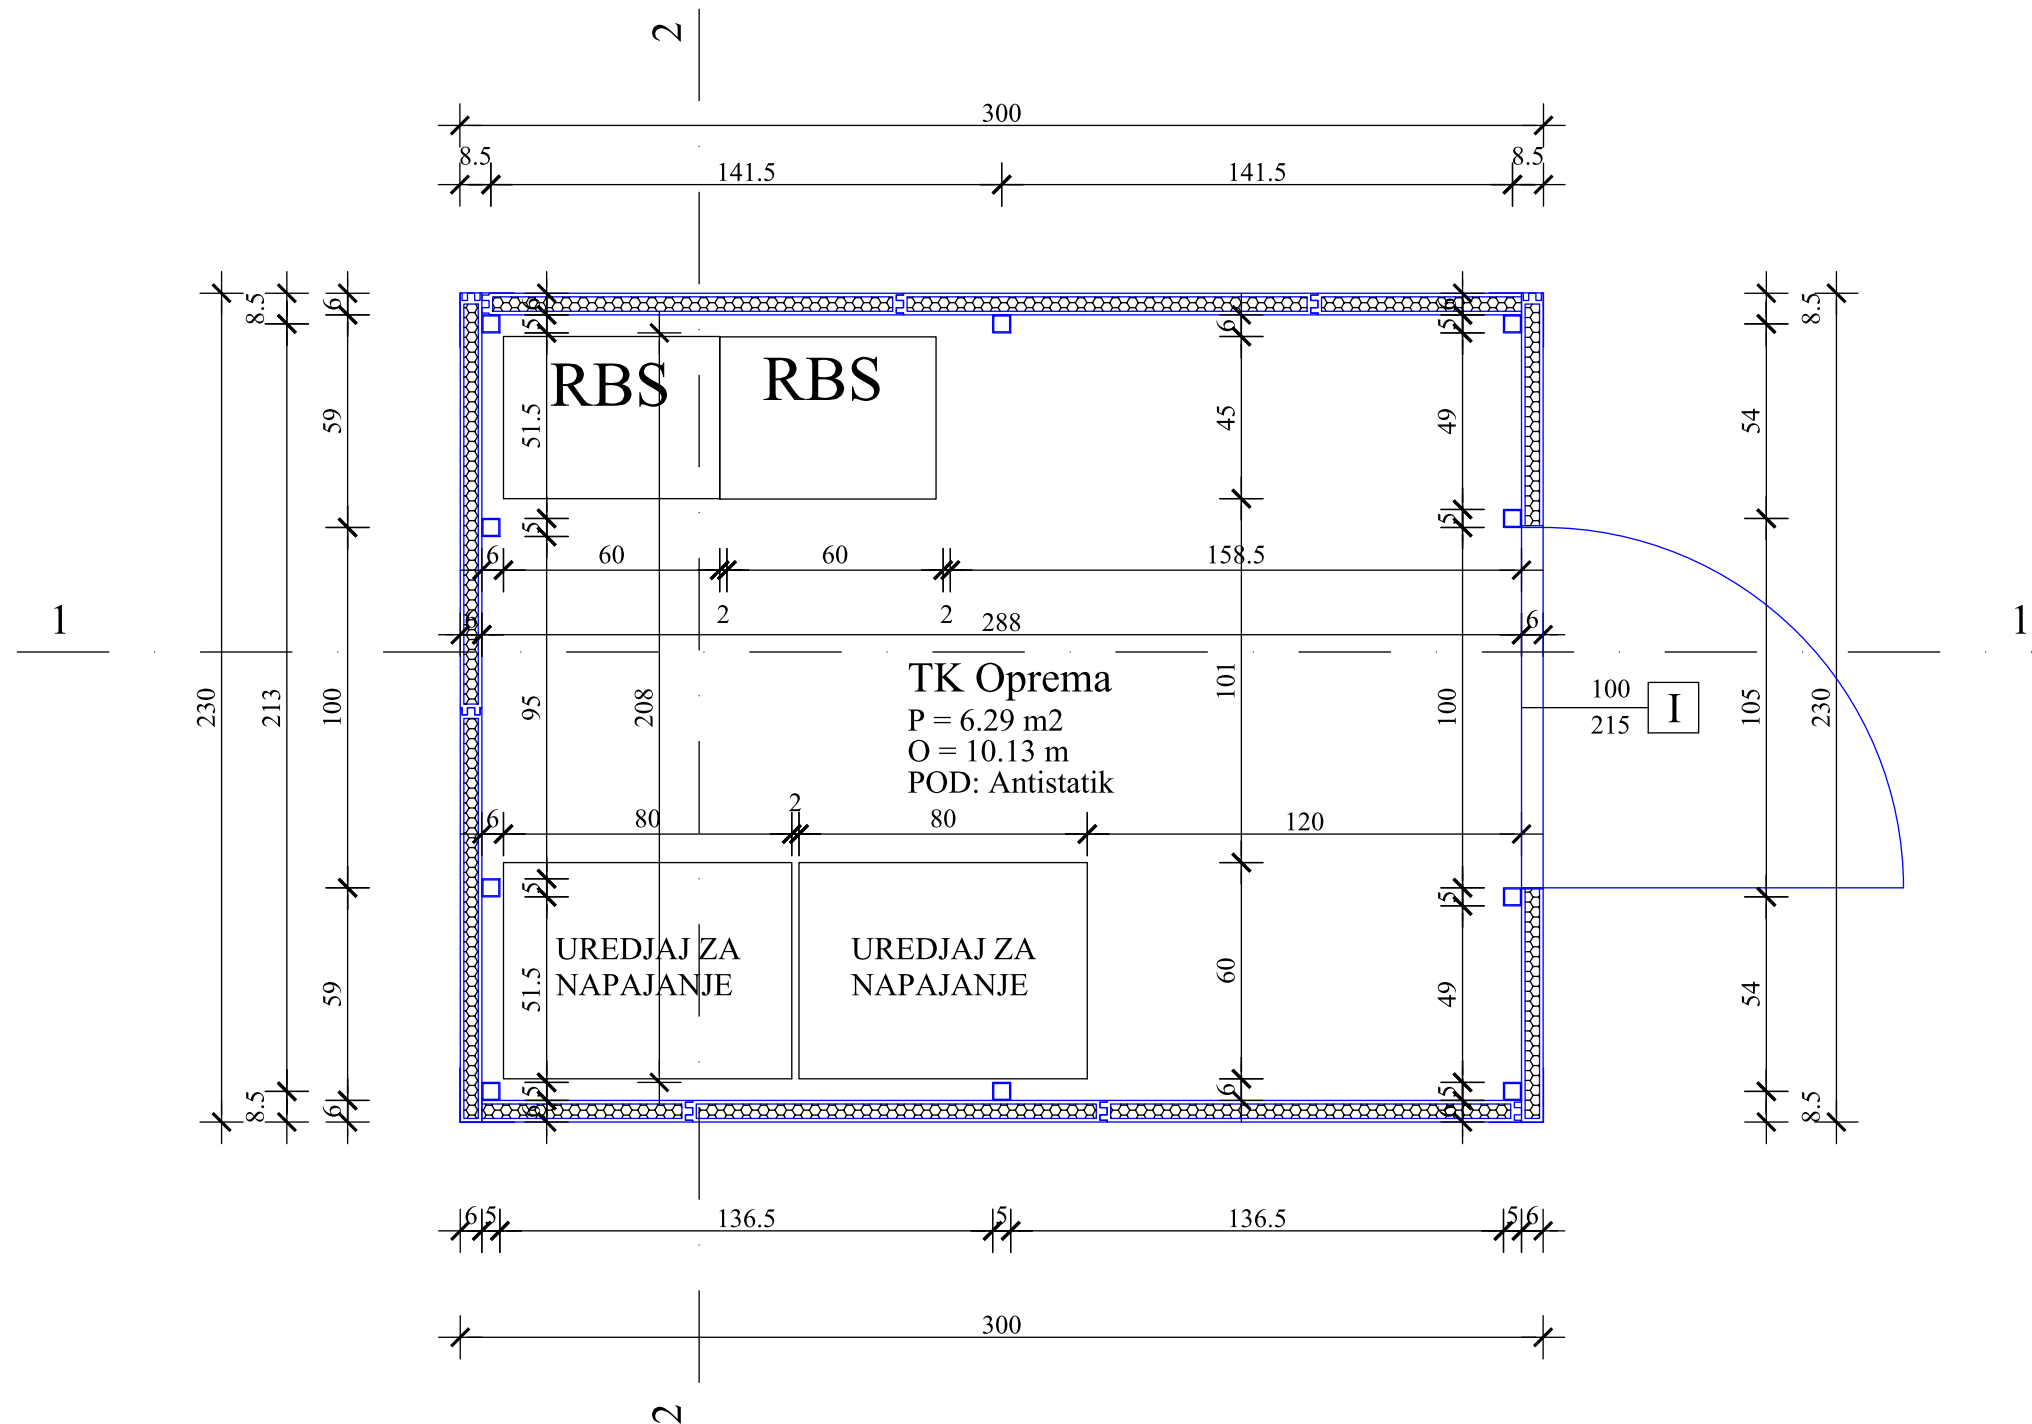





Investitor: BH TELECOM d.d.		Objekat: Infrastruktura bazne stanice mobilne telefonije	
Glavni projekat Knjiga 1/1	Faza: A	godina: 2018.	šifra projekta: GP-BS-10472-326
Naziv crteža: Osnova objekta za smještaj opreme		razmjera: 1:50	broj crteža: 1 - (148/177)
		ovjerio: Projektant: Dženadin Mušinić, d.i.g.	

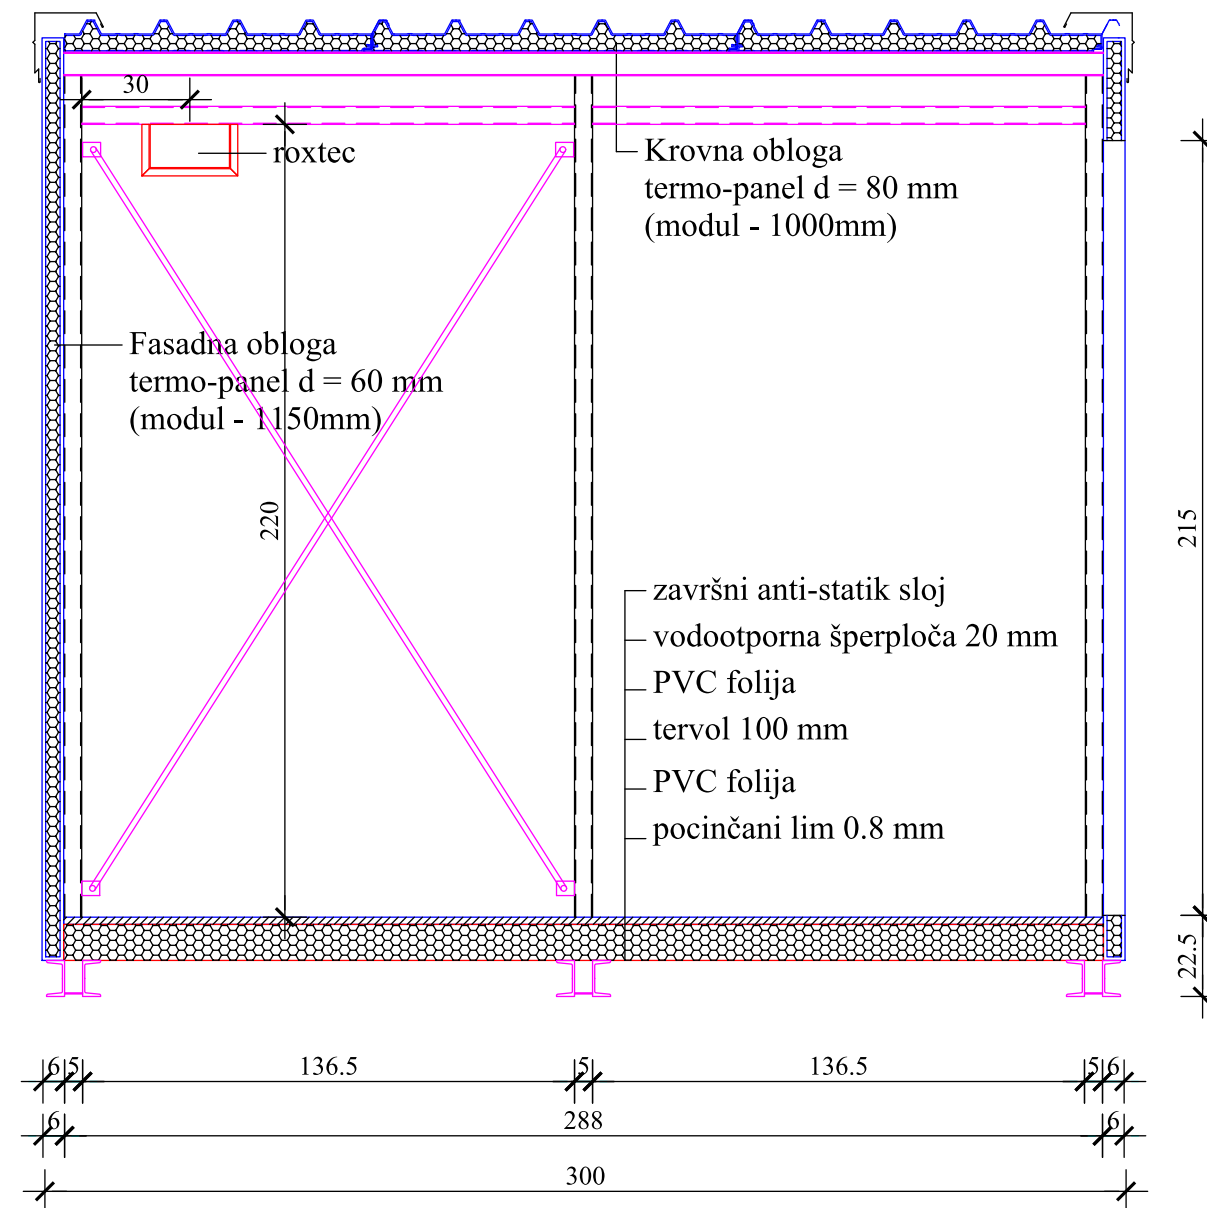

Investitor: BH TELECOM d.d.		Objekat: Infrastruktura bazne stanice mobilne telefonije		 Dioničko društvo Sarajevo	
Glavni projekat Knjiga 1/1	Faza: A	godina: 2018.	šifra projekta: GP-BS-10472-326		
Naziv crteža: Presjek 1-1 objekta za smještaj opreme		razmjera: 1:50	broj crteža: 2 - (149/177)	ovjerio:  Projektant: Dženadin Mušinović, d.i.g.	

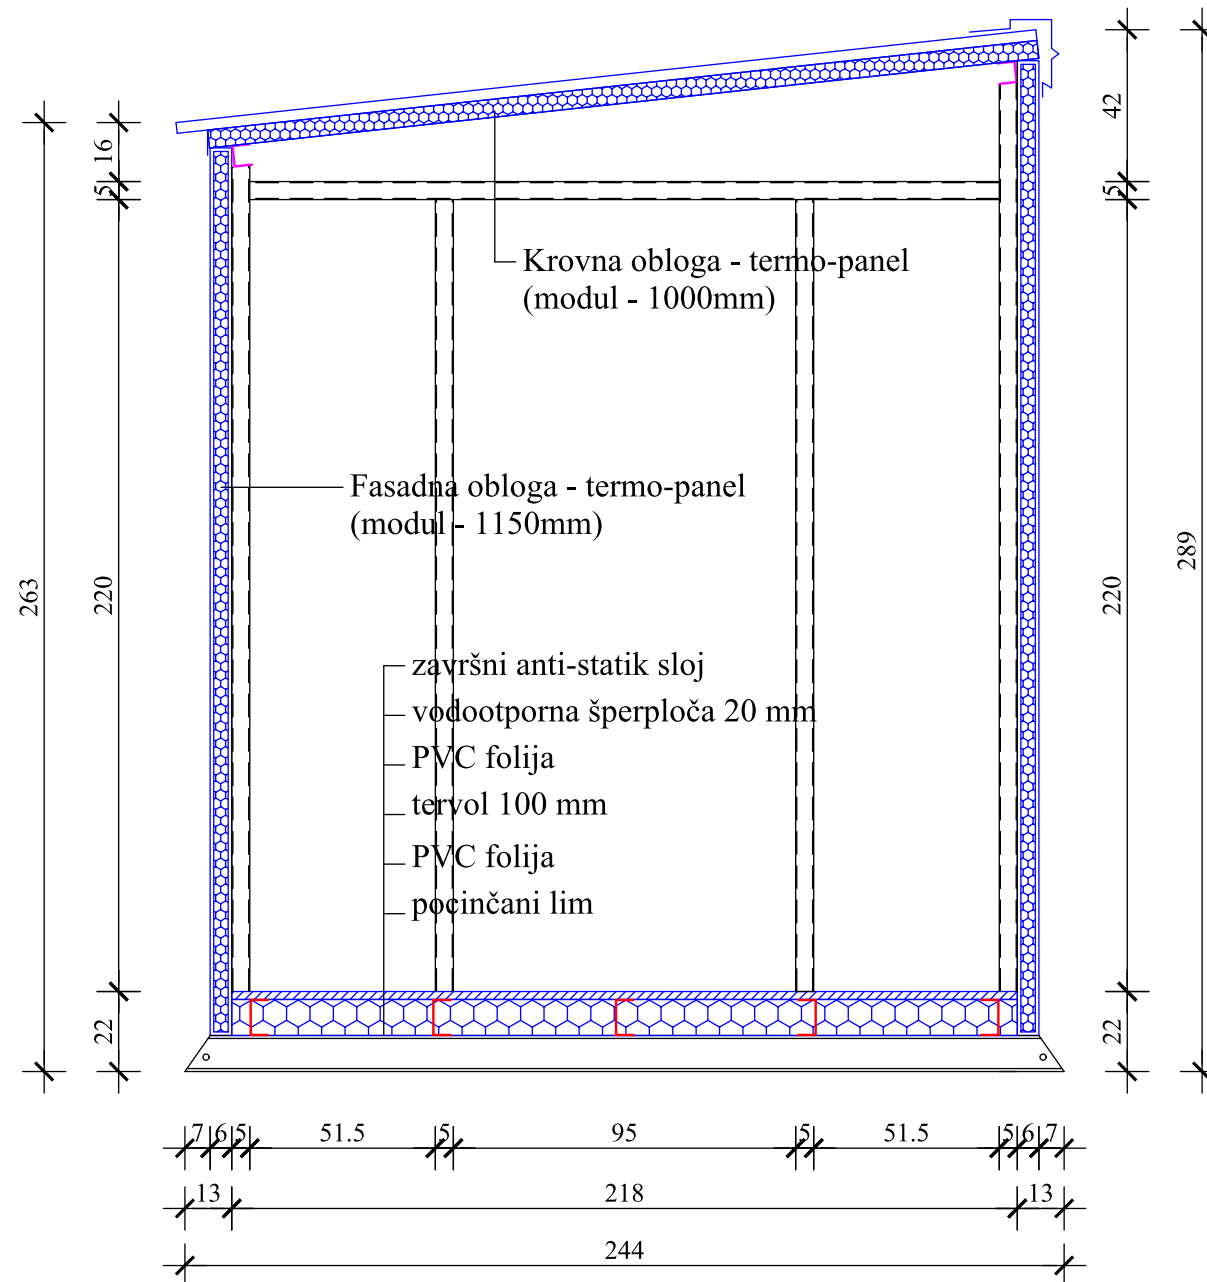


Investitor: BH TELECOM d.d.		Objekat: Infrastruktura bazne stanice mobilne telefonije		 Dioničko društvo Sarajevo	
Glavni projekat Knjiga 1/1	Faza: A	godina: 2018.	šifra projekta: GP-BS-10472-326		
Naziv crteža: Presjek 2-2 objekta za smještaj opreme			razmjera: 1:50	broj crteža: 3 - (150/177)	ovjerio: Projektant: Dženadin Mušinić, d.i.g.

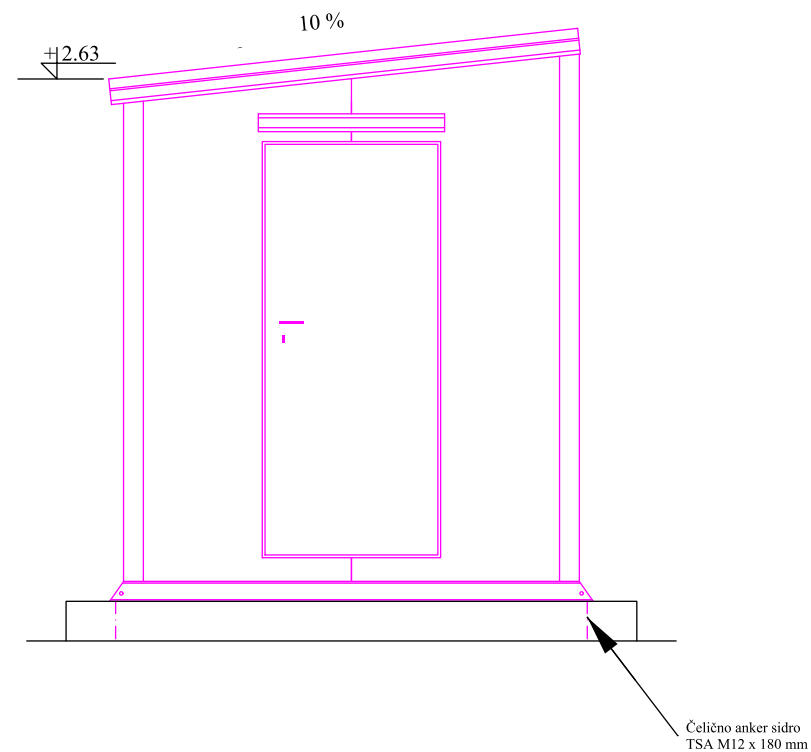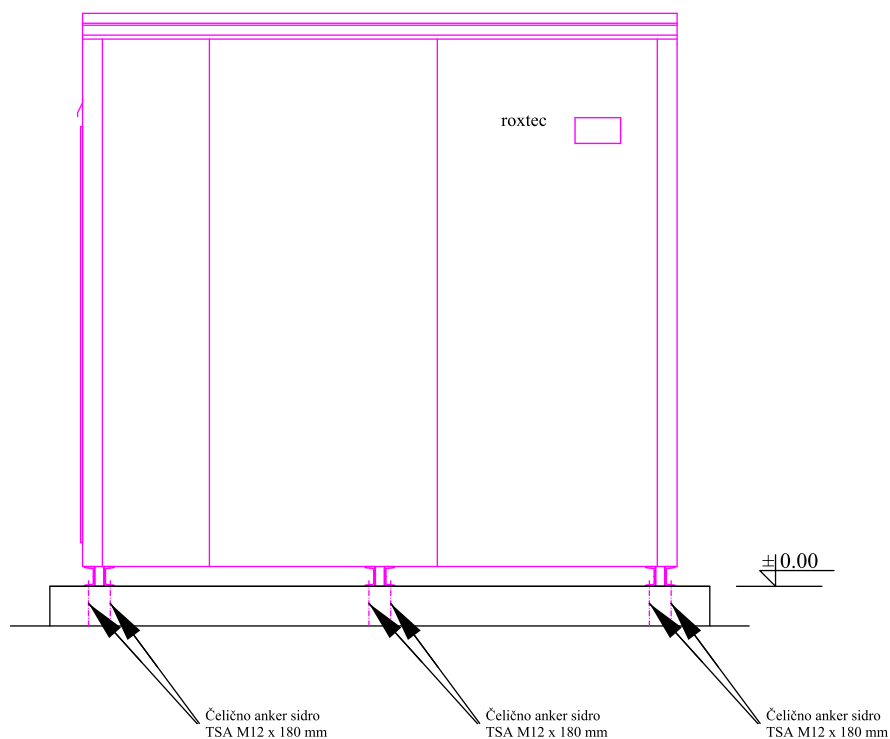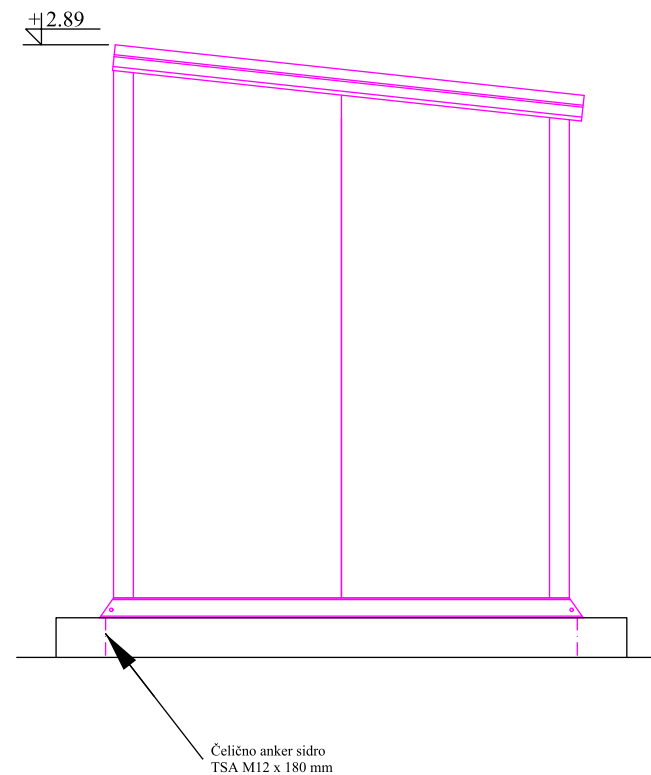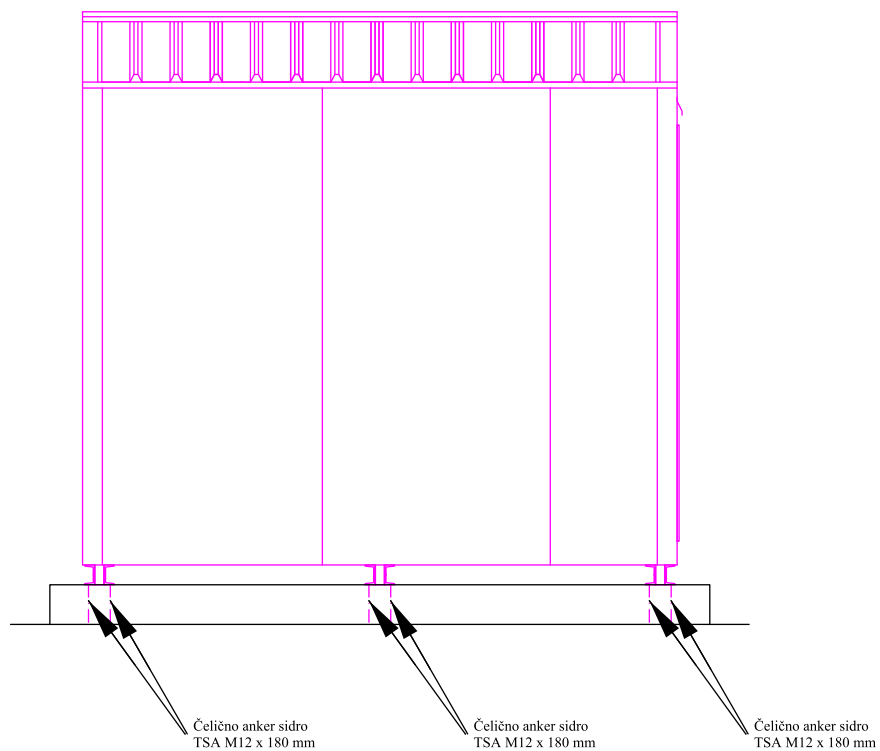


Investitor: BH TELECOM d.d.		Objekat: Infrastruktura bazne stanice mobilne telefonije		 Dioničko društvo Sarajevo	
Glavni projekat Knjiga 1/1	Faza: A	godina: 2018.	šifra projekta: GP-BS-10472-326		
Naziv crteža: Fasade objekta za smještaj opreme				razmjera: 1:50	broj crteža: 4 - (151/177)
				ovjerio: Projektant:Dženadin Mušinović,d.i.g.	


Ugaoni vanjski opšav

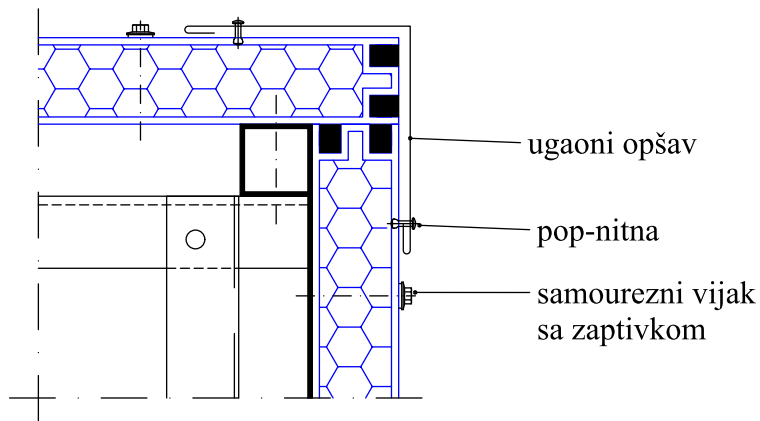


Čeoni lim na višem kraju krova

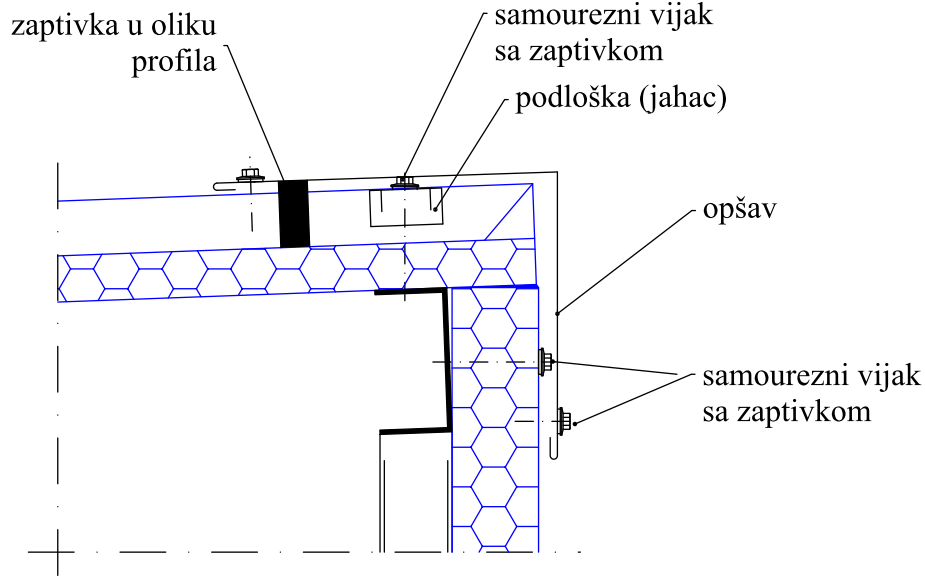

Čeoni lim na nižem kraju krova

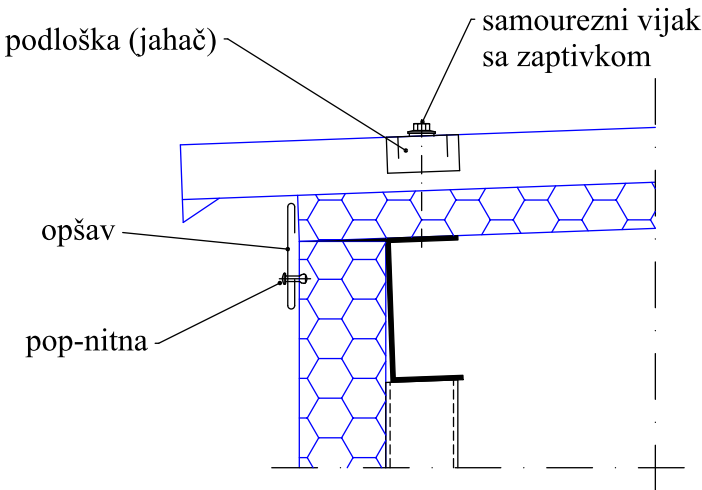

Bočni krovni opšav

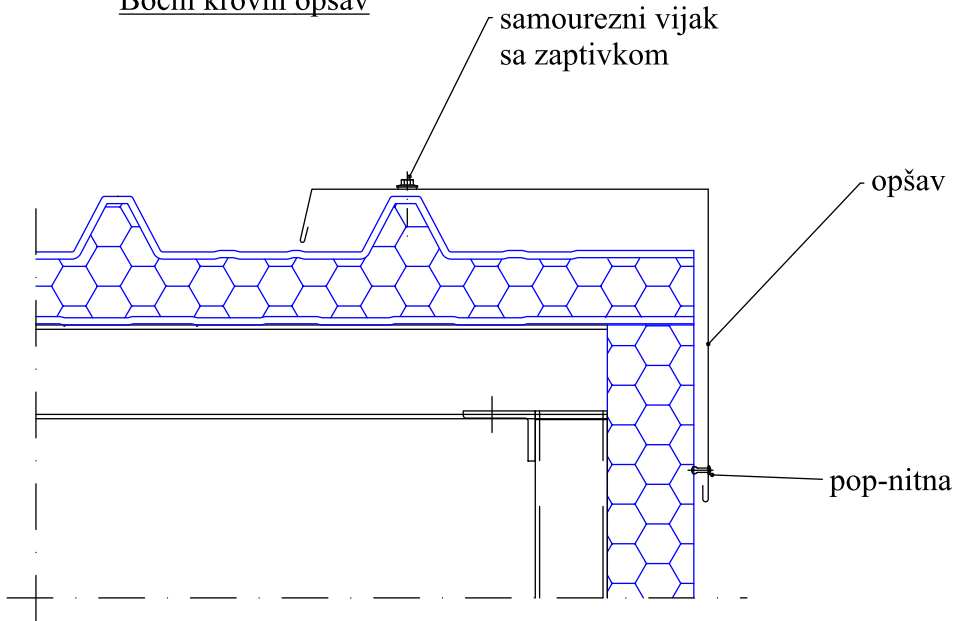


Investitor: BH TELECOM d.d.		Objekat: Infrastruktura bazne stanice mobilne telefonije		bh telecom Dioničko društvo Sarajevo	
Glavni projekat Knjiga 1/1	Faza: A	godina: 2018.	šifra projekta: GP-BS-10472-326	broj crteža: 5 - (152/177)	ovjerio: Projektant: Dženadin Mušinović, d.i.g.
Naziv crteža: DETalji objekta za smještaj opreme				razmjera: 1:50	

Figure 1 illustrates the reinforcement layout of the square slab. The slab is square with a total width and height of 540 mm. The reinforcement layout includes four corner bars (4 M 36) and two diagonal bars (565.7). The dimensions are specified as 540 mm total, with 400 mm for the main span and 50 mm for the edge distance. The diagonal bars are labeled 565.7.

Technical drawing of a J-shaped profile. The drawing includes the following dimensions and labels:

- A vertical dimension of 15 on the left side.
- A horizontal dimension of 29 across the middle of the vertical stem.
- A horizontal dimension of 120 along the bottom of the vertical stem.
- A horizontal dimension of 20 at the top of the vertical stem.
- A label "M 36" positioned above the vertical stem.

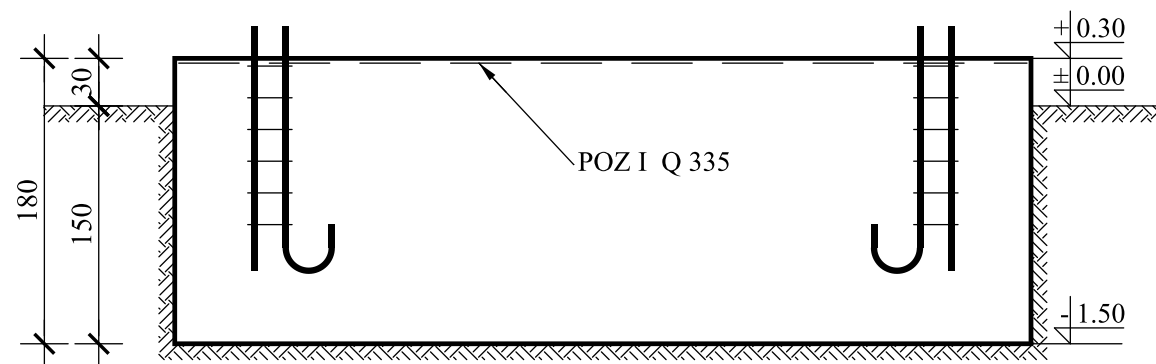


MB 25 (B.I, M-100)
RA 400/500
MA 500/560


Investitor: BH TELECOM d.d.		Objekat: Infrastruktura bazne stanice mobilne telefonije		 Dioničko društvo Sarajevo	
Glavni projekat Knjiga 1/1	Faza: K	godina: 2018.	šifra projekta: GP-BS-10472-326		
Naziv crteža: Plan oplate i armature temelja			razmjera: 1:50	broj crteža: 3 - (121/177)	ovjerio:  Projektant:Dženadin Mušinić,d.i.g.

INSTALISANA SNAGA:		
FAZA	POTROŠAČ	SNAGA
L1	2xUPS	6kW
L2	UPS+utičnice+klima	6,4kW
L3	UPS+utičnice+TZ+rasvjeta	6,6kW
ukupno		19kW
maksimalna snaga	$pr_{\Sigma}=0,85$	16,1kW

Investitor: BH TELECOM d.d.		Objekat: Infrastruktura bazne stanice mobilne mreže		 Dioničko društvo Sarajevo	
Glavni projekat Knjiga EI	izdanje: I	godina: 2018.	šifra projekta: GP-BS-10472-326		
Naziv crteža: 3.5.2. Jednopolna šema GRO			razmjera:	broj crteža: 48/69	Projektant: Močević Džafer,d.e.i. ovjerio: 

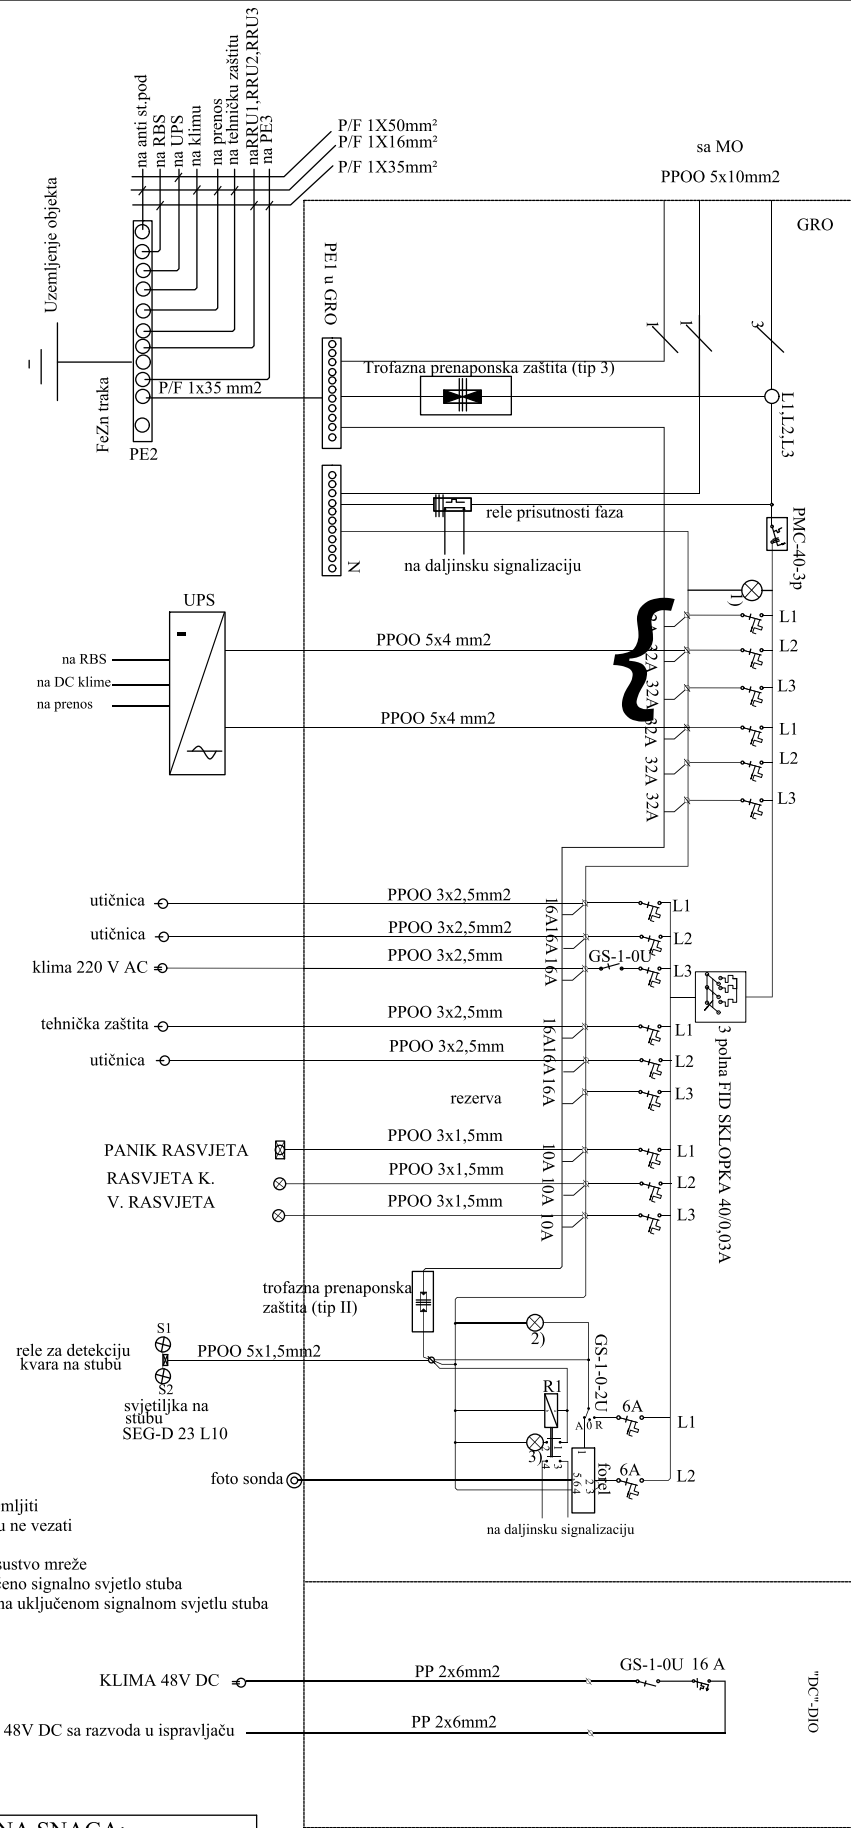

PV Proizvodnja — Heatmap (W, prosjek po satu)

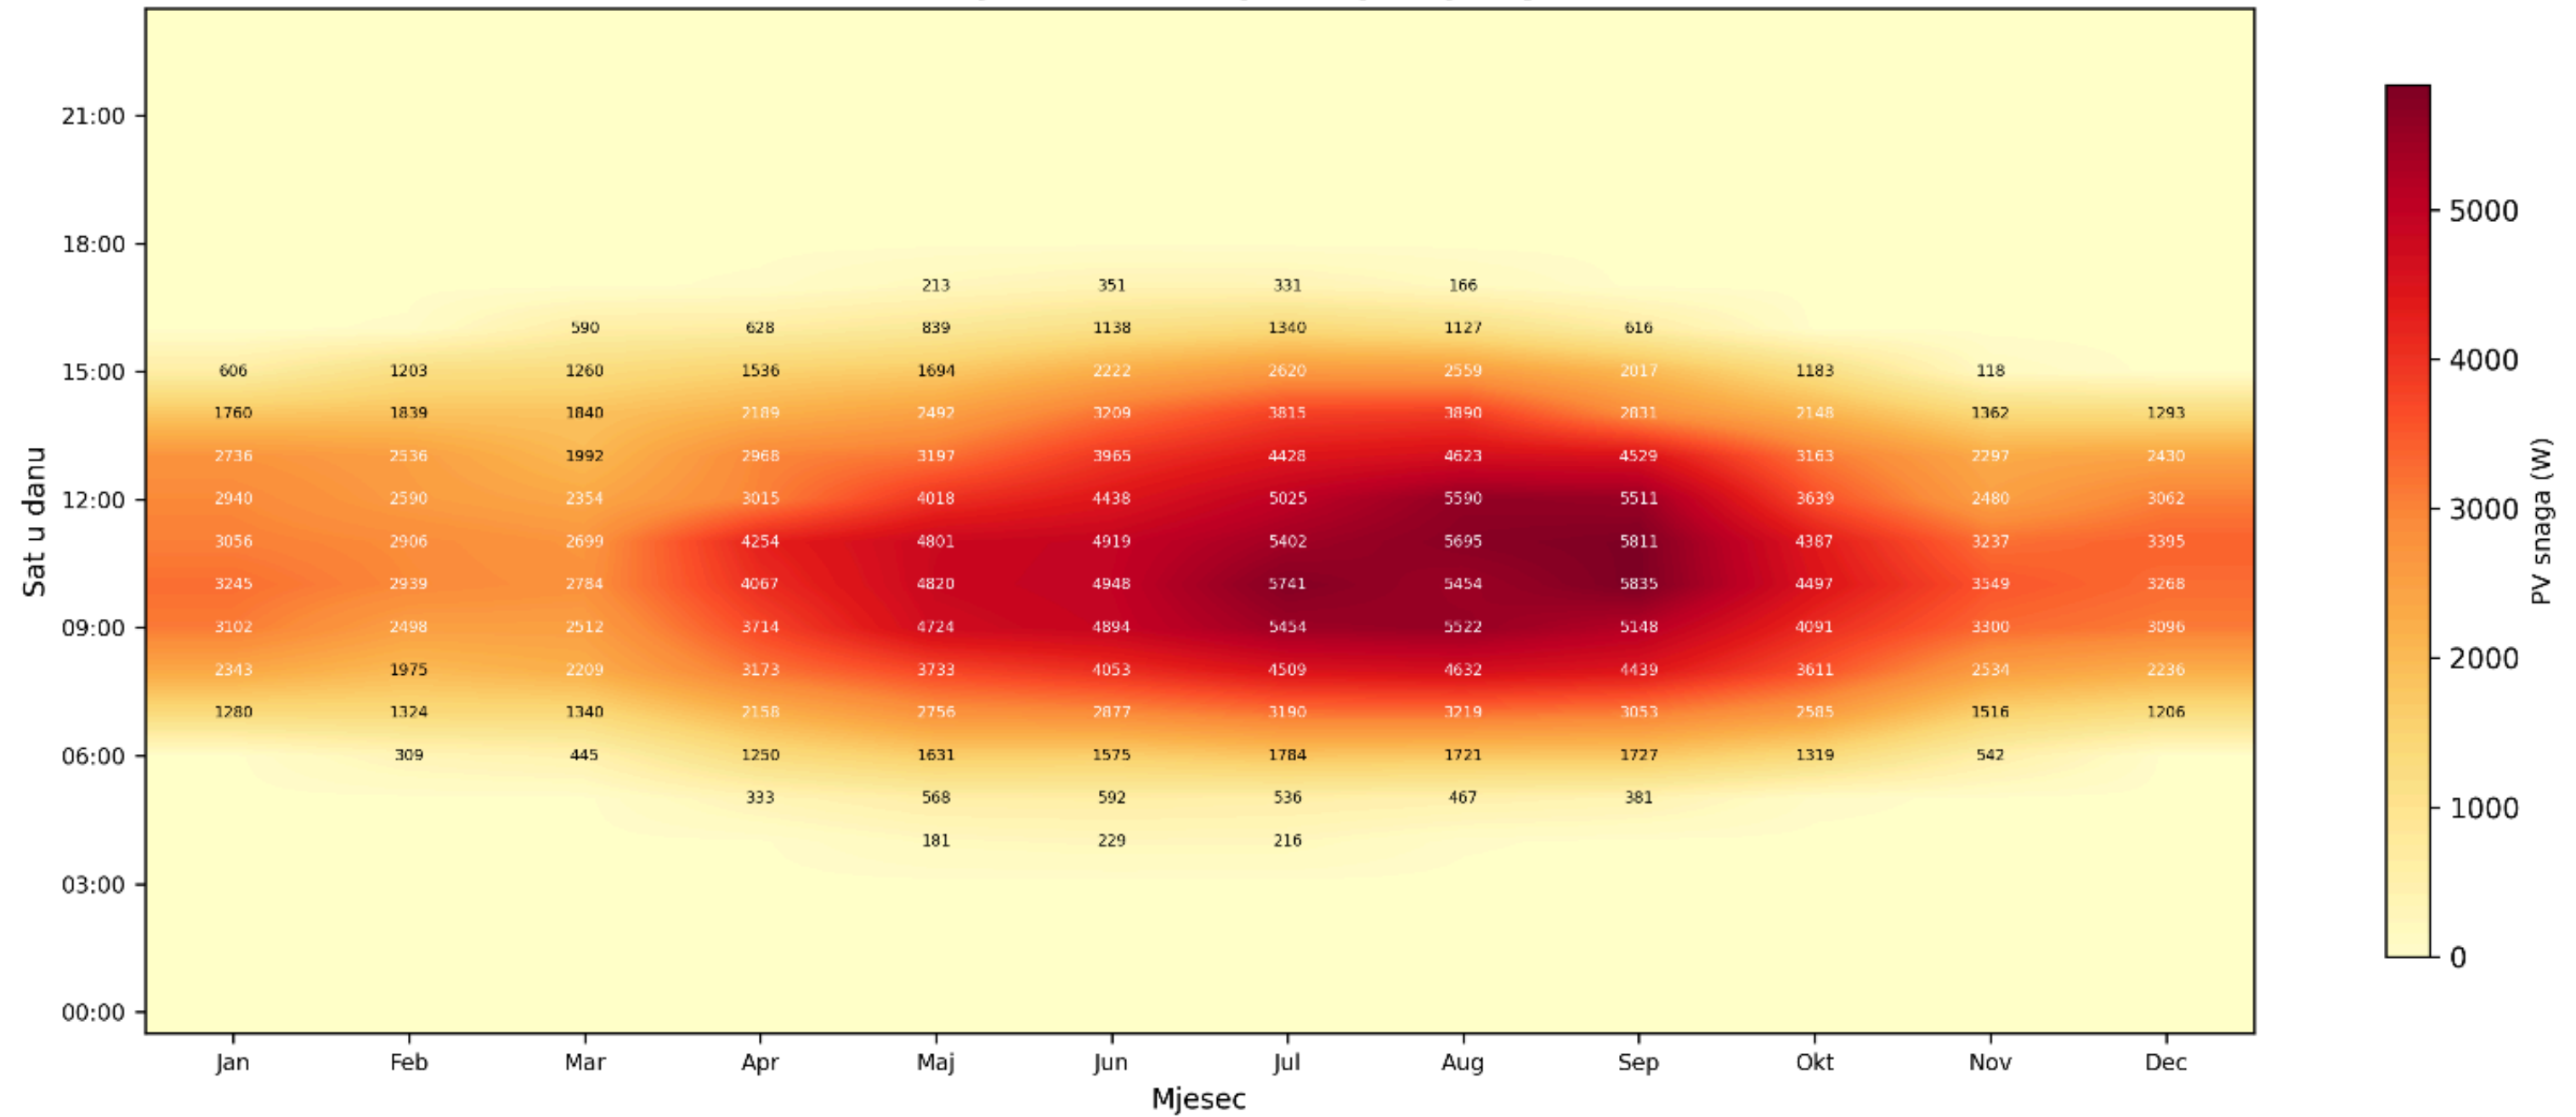

NAPOMENA: Prikazane vrijednosti NISU MJERODAVNE - referentna simulacija sadrzi gresku reda velicine.
Mjerodavno za 12 x 585 Wp (7,02 kWp): ocekivana godisnja proizvodnja 10,1-10,9 MWh; decembar 560-600 kWh naspram potrosnje 878 kWh - DEA je nuzan.